


Herringbone Click

14 mm Click

Technical information	
Produced according to:	European parquet norm EN 13489 - 2017
Dimension:	14 x 138 x 690 mm
Toplayer:	3.5 mm nominal
Construction:	3-layer construction; Hardwood toplayer, middlelayer made of HDF and bottomlayer made of spruce Toplayer 3.5 mm nominal Middlelayer 8.8 mm Bottomlayer 1.7 mm
Profile:	5G Click, not combineable with other Boen products
Installation:	floated or glued
Boards/ m ² per carton:	10/ 0.95 A-planks and B-planks as separate articles
Cartons/ m ² per pallet:	49/ 46.55
Slotted top layers per carton/ minimum length (mm):	-
Weight per carton/ pallet in kg:	11/ 539
Floor heating systems:	Well suitable
Fire behavior ¹⁾ :	Dfl-s1
Content of formaldehyd ²⁾ :	E1
Content of pentachlorophenol (PCP) ²⁾ :	no performance detected
Density kg/ m ³ ²⁾ :	about 600
Antislip performance:	Live Natural sanded USRV 59 ⁴⁾ R10 ⁵⁾ Live Natural brushed USRV 45 ⁴⁾ R10 ⁵⁾ Live Pure brushed USRV 91 ⁴⁾ R11 ⁵⁾
Abrasion resistance:	
Thermal conductivity ²⁾ :	0.14 W/ (m·K)
Areal thermal resistance ³⁾ :	0.09 (m ² ·K)/ W

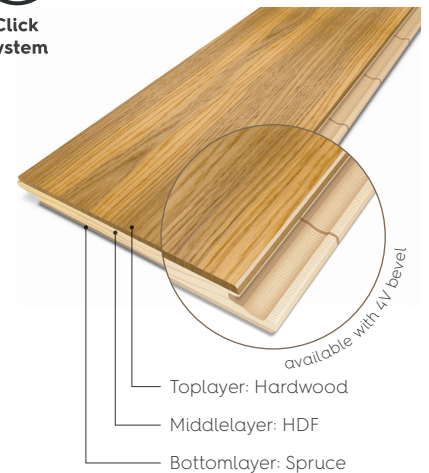

DOP 4658



www.blauer-engel.de/uz176



¹⁾ according to DIN EN 13501-1, ²⁾ according to DIN 14342, ³⁾ according to EN 12524,

⁴⁾ according to CEN/TS 15676, ⁵⁾ according to DIN EN 51130